

FIG. 1




FIG. 2

RECEIVE AT A HOST SYSTEM AN ASYNCHRONOUS MESSAGE FROM A STORAGE DEVICE AS A RESULT OF A CURRENT MEDIA STATUS CHANGE, WHEREIN THE MESSAGE CAN ALSO BE RECEIVED FOR A REASON OTHER THAN A CURRENT MEDIA STATUS CHANGE

ARRANGE FOR A POWER STATE ASSOCIATED WITH THE STORAGE DEVICE TO BE ADJUSTED AS A RESULT OF THE MESSAGE

304

FIG. 3

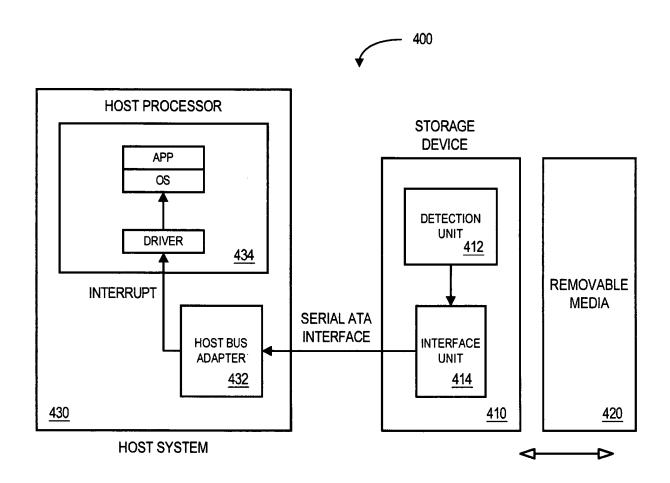


FIG. 4

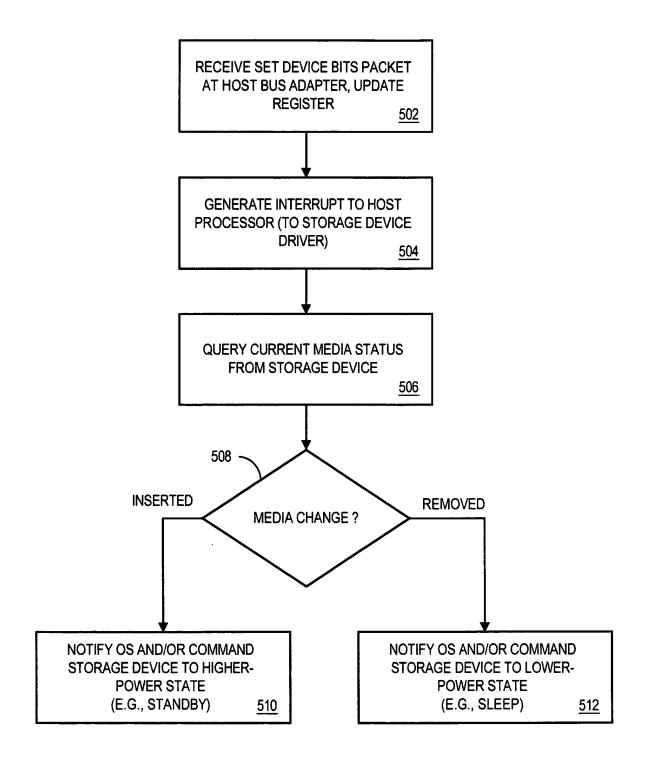


FIG. 5

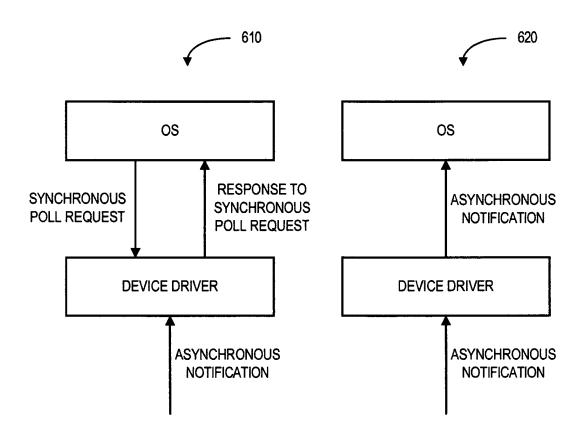


FIG. 6

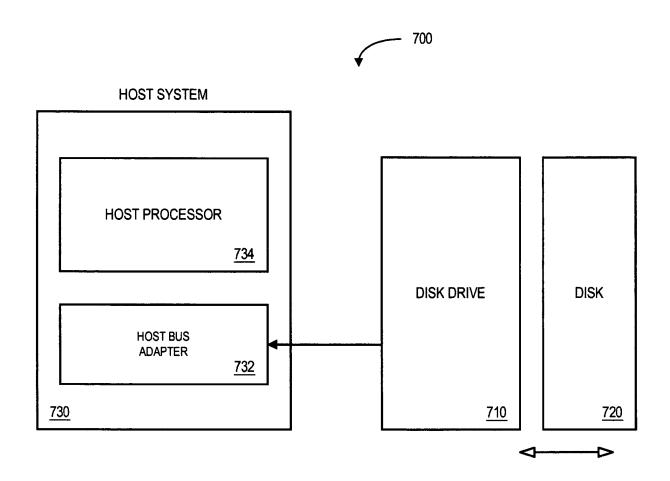


FIG. 7